



28-6, Gajangsaneopdong-ro,
Osan-si, Gyeonggi-do, 18103, Republic of Korea
TEL : +82-31-8077-5000 / FAX : +82-31-624-5310
<http://www.miniprinter.com>

sewoo


F/W DOWNLOAD MANUAL

- LK-P12 -

Rev.C 04 / 2022

Aroot Co., Ltd.

The manual and product are protected by copyright.




INDEX

1. Download Printer Firmware	2
2. Download Fonts	4
3. Download Bluetooth (or Wi-Fi) Firmware	6
4. Recovery Mode	12


1. Download Printer Firmware

01 Execute the program “FW Download Program.exe”.

02 Select Model “LK-P12”.

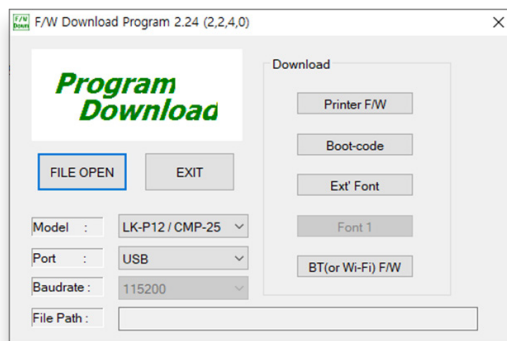


03 Choose the rom file after clicking “FILE OPEN” button.

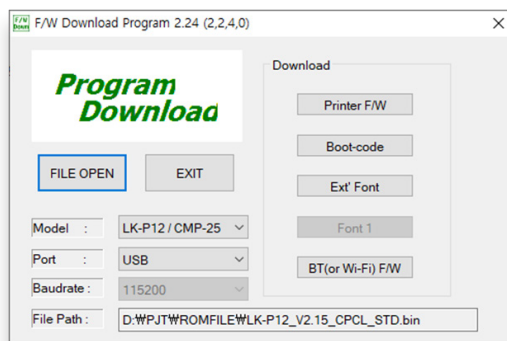

04 Click the button “Printer F/W”.

05 When the following message shows up ,click “Yes” button

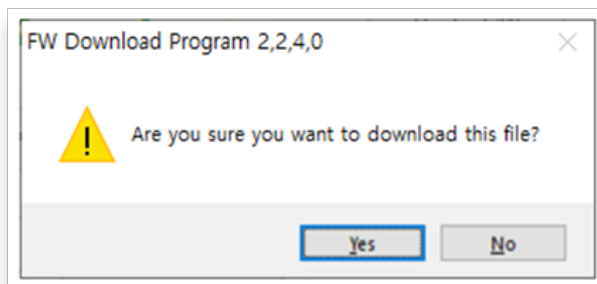


06 The Buzzer will sound soon and the power will turn off.


2. Download Fonts

01 Execute the program “FW Download Program.exe”.

02 Select Model “LK- P12”.

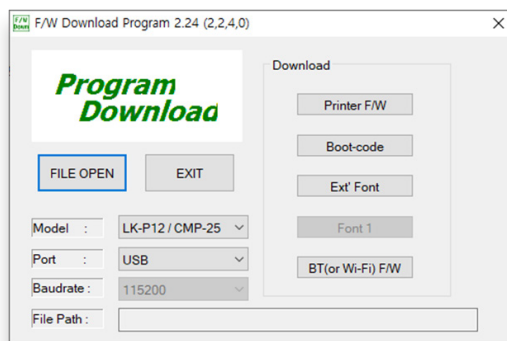


03 Choose the font file after clicking “FILE OPEN” button.

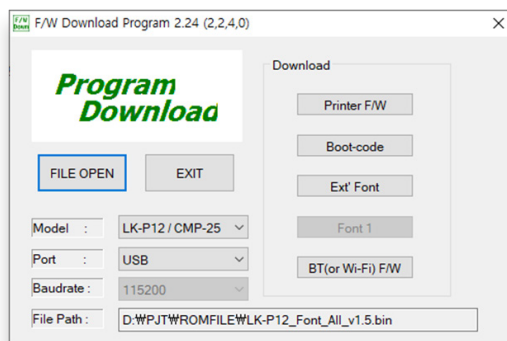

04 Click the button “Ext’ Font”.


05 When the following message shows up ,click “Yes” button.

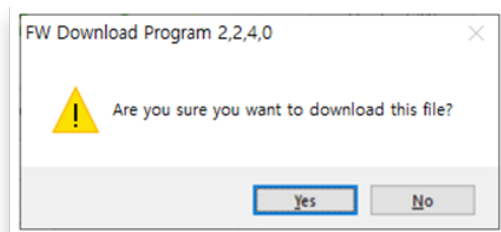


06 The Buzzer will sound soon and the power will turn off.

3. Download Bluetooth (or Wi-Fi) Firmware


3-1 Wi-Fi or Bluetooth BLUE GIGA

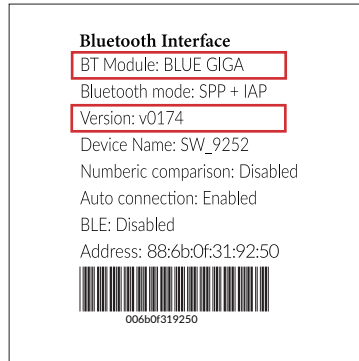

- 01 You can see Bluetooth(or Wi-Fi) version on "Self Test" If the version is lower than yours, do update.
- 02 Execute the program "FW Download Program.exe".
- 03 Select Model "LK- P12".

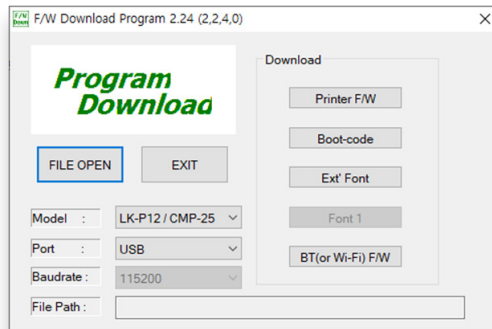


- 04 Choose the rom file after clicking “FILE OPEN” button.

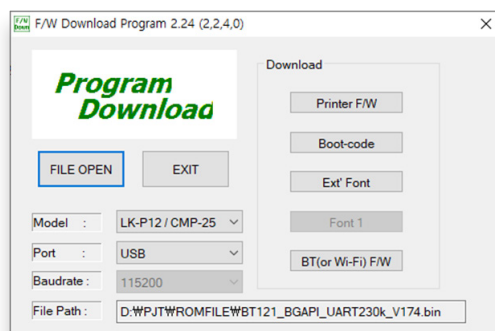



- 05 Click the button “BT(or Wi-Fi) F/W”.


- 06 When the following message shows up ,click “Yes” button.

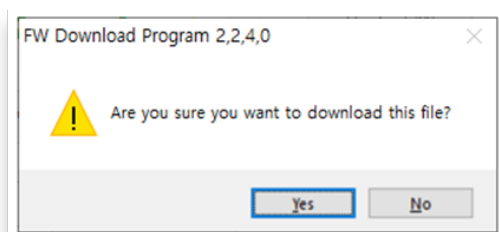


3-2 Bluetooth MOVON 4.2

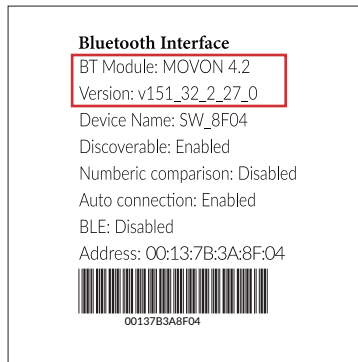


- 01 Execute the program "Configuration Tool.exe".
- 02 Refer to "Configuration Tool Manual" and set BLE "Enable".
- 03 Run Bluetooth in your android phone.
- 04 Link " MOVON BLE Device " in your android phone.
- 05 Download and Install OTA_Android.
- 06 Run LE OTA .
- 07 Tab to select a device and select "MOVON_BLE".

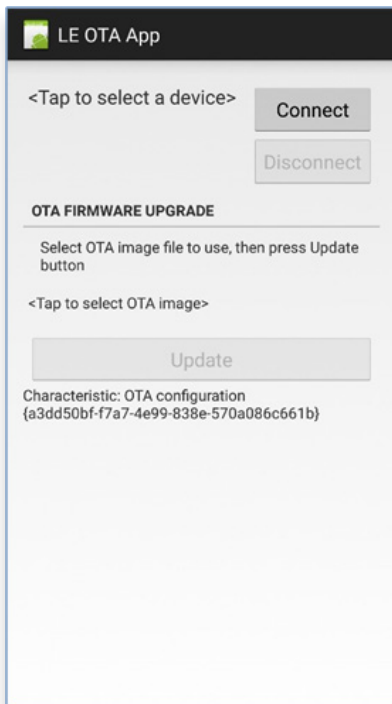

08 Click "Connect" and "Tab to select OTA image".


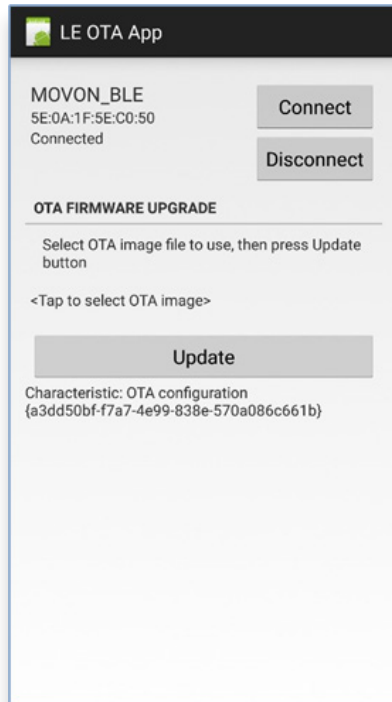


- 09 Select OTA image file to use, then press Update button.
- 10 You can see "Success".

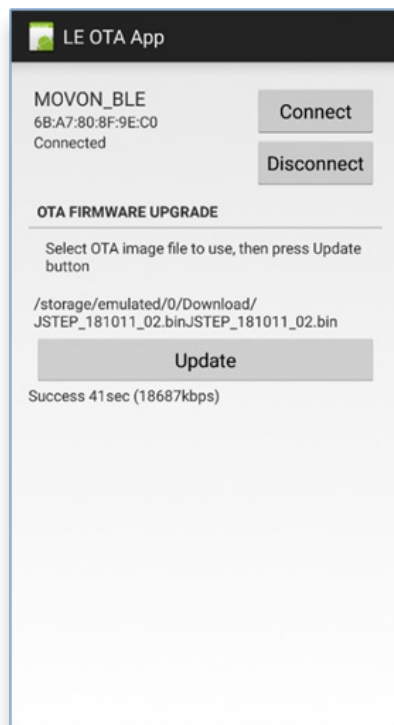


4. Recovery Mode

- 01 Cover open the printer.
- 02 Press Left TOP button and Power button to enter recovery mode.
- 03 If battery led blinks, release button.
- 04 Execute the program "FW Download Program.exe".
- 05 Select Model "LK- P12".

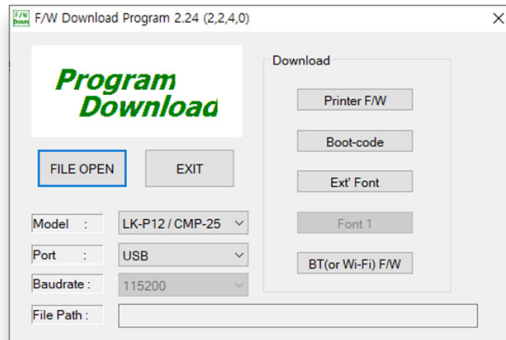


- 06 Choose the rom file after clicking "FILE OPEN" button.

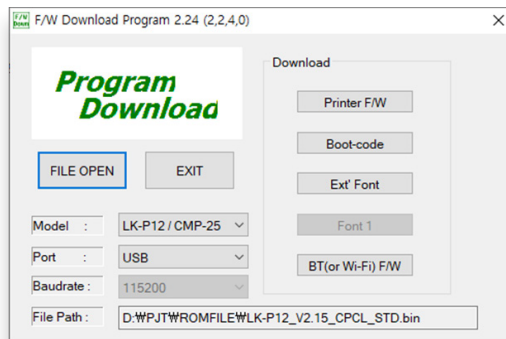

07 Click the button "Printer F/W".

08 When the following message shows up ,click "Yes" button.

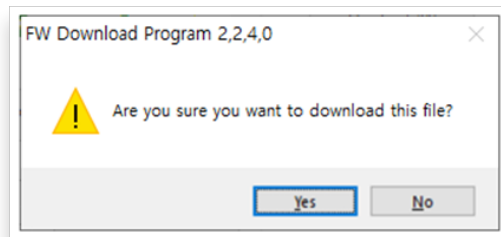

09 The Buzzer will sound soon and the power will turn off.